

MZ-511 无线组网音箱


MZ-511
无线组网音箱

感谢您购买此产品。在使用无线音箱之前，请阅读所有安全信息和操作说明。


安全守则

- 请阅读并遵循本说明。
- 请在室温下保存或使用。
- 请勿在热源附近使用本产品，如散热器、烩调节器、火炉或其他发热仪器（包括放大器）。
- 各类故障应由专业维修人员进行维修，擅自拆卸将导致保修失效。

包装内容

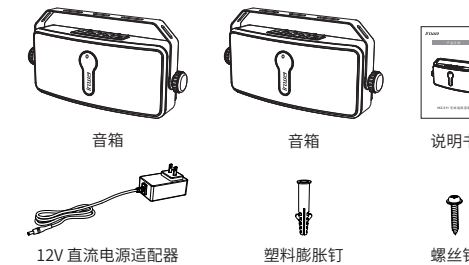


产品描述

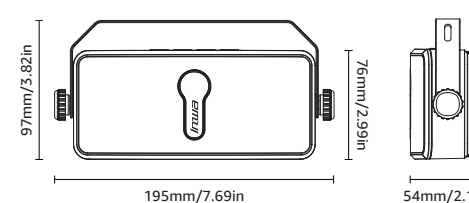

产品参数

蓝牙版本:	5.0
无线距离:	≤15M
输入电压:	DC12V/2A
输出功率:	20W
失真度:	< 0.1%
频率响应:	20Hz-20KHz
信噪比:	> 80dB
防水等级:	IPX5

控制面板和界面

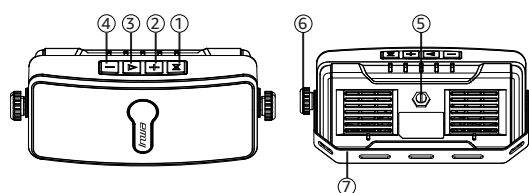


1. 蓝牙与组网配对按键：长按2秒组网模式，双击进入蓝牙强制配对模式。
2. 音量+/下一曲键：短按下一曲，长按音量+。
3. 播放/暂停键：短按播放暂停。
4. 音量-/上一曲键：短按上一曲，长按音量-。
5. 电源线接口
6. 旋钮
7. 支架


操作指令

步骤1
接上电源，音箱会自动开机，有提示音，进入配对状态。

步骤2
首次组网配对方法：
必须先选择一个音箱连上手机作为主机（不播放音乐），然后从机会自动连上主机长亮红灯，具有记忆功能，下次开机手机连上蓝牙后从机会自动连接主机。

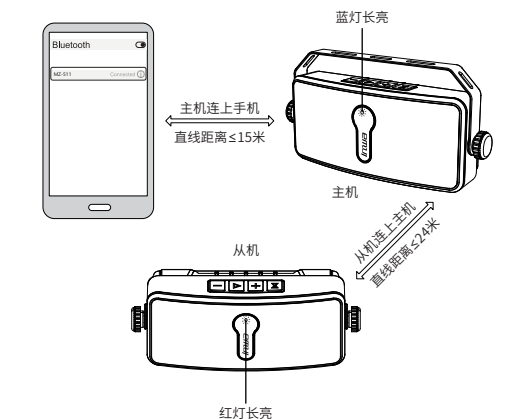


*断开组网模式方法：两台或多台音箱连接成功后，长按任一从机音箱的组网键2秒至蓝灯快闪即解除组网模式，再长按2秒至红灯快闪进入自动组网模式。

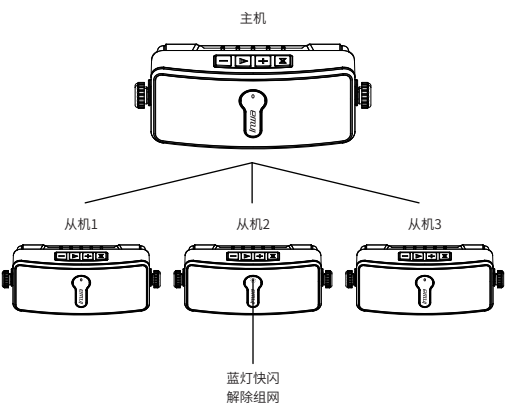


中文

步骤3
蓝牙连接与断开手机连接方式：
音箱连接蓝牙状态下，双击组网键至蓝灯快闪，然后打开手机蓝牙功能，搜索蓝牙音箱的名称：MZ-511，然后点击连接音箱，连上音箱后蓝灯长亮。

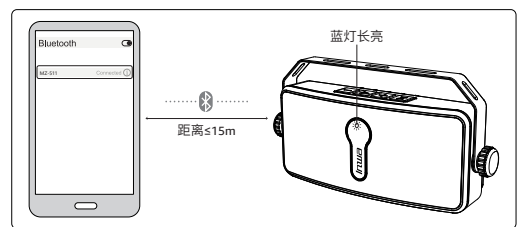

步骤4

播放音乐时，主机蓝灯慢闪，从机红灯长亮。

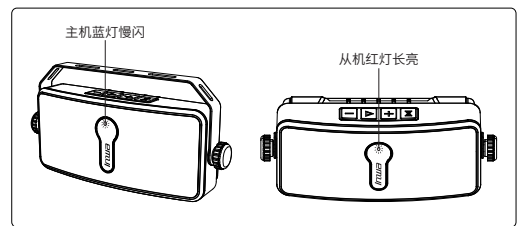

中文

安装步骤
注意
1. 安装前请确认音箱能正常工作。
2. 图A中的工具不包括在内。

步骤1
从产品上拆下支架，按照间距在墙上钻两个安装孔（见图A）。

步骤2
使用附件中的螺钉将支架拧入墙壁上的安装孔。

步骤3
将音箱安装在支架上，将其调整到您想要的角度并拧紧螺丝。



中文

产品型号	购买日期
经销商	用户姓名
联系电话	电子邮件
用户地址	


保修记录

用户姓名	故障描述	维修日期	维修人员签字

合格证

日期: _____

检验员: _____

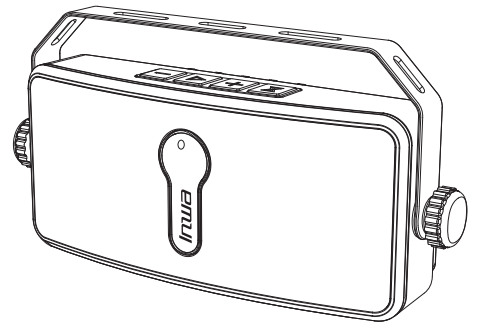

MZ-511

Wireless Networking Speaker

MZ-511

Wireless Networking Speaker

Thank you for buying this product. Please read all safety information and operation instruction before using the bluetooth speaker.

SAFETY INSTRUCTIONS

- Please read and follow this instruction.
- Please keep or use at room temperature.
- Please do not use this product near heat sources such as radiators, enthalpy regulators, stoves or other heat generating instruments (including amplifiers).
- All types of malfunction should be repaired by professional maintenance staff, disassemble without permission will void the warranty.

PACKAGE CONTENTS



Speaker

Speaker

User manual




12V DC Power Adapter

Plastic Expansion Nail

Screw

DIMENSIONS

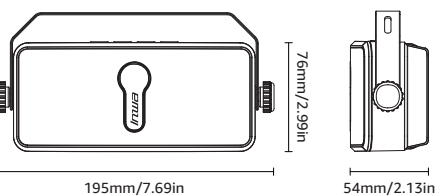

195mm/7.69in


97mm/3.82in

54mm/2.13in

PARAMETER

Bluetooth version:	5.0
Wireless distance:	≤15M
Input voltage:	DC12V/2A
Output power:	20W
Distortion:	< 0.1%
Frequency range:	20Hz-20KHz
SNR:	> 80dB
Waterproof level:	IPX5

SPEAKER CONTROL PANEL AND PORTS

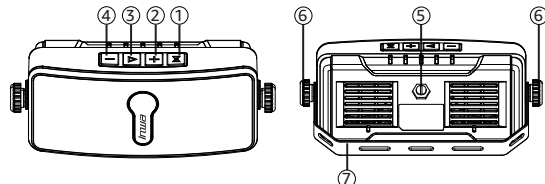

1. Networking Key: Long press for 2 seconds switch to the **Main** or **Aux.** working mode.
2. Volume + / Next track Button: short press the next track, long press the volume +.
3. Play/Pause key: Short press to pause the play.
4. Volume- / Previous Button: short press the previous song, long press the volume-.
5. Power cord port
6. Knob
7. Bracket


OPERATION INSTRUCTION

Step 1

Bluetooth connection with one speaker:

Power on the speaker via connect to the power supply, the blue indicator flashes. Turn on the mobile phone Bluetooth to search for "MZ-511" and connect with it.

(Note: If the red indicator flashes after the speaker powered on, long press the networking key to switch to the blue indicator flashing. Bluetooth can only be connected when the blue indicator flashes)

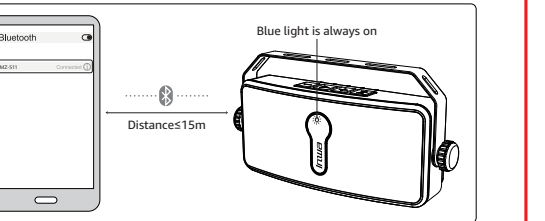


Step 2

Network pairing with Multiple speakers:


After finish with step 1, you have Bluetooth connected one speaker (**Main**) with your mobile phone, power on the other speakers (**Aux.**), and they will auto pair with the **Main** speaker when their indicator lights are in red.

(Note: If the indicator of **Aux.** speaker does not show red after they powered on, Please long press the networking key to switch to red)

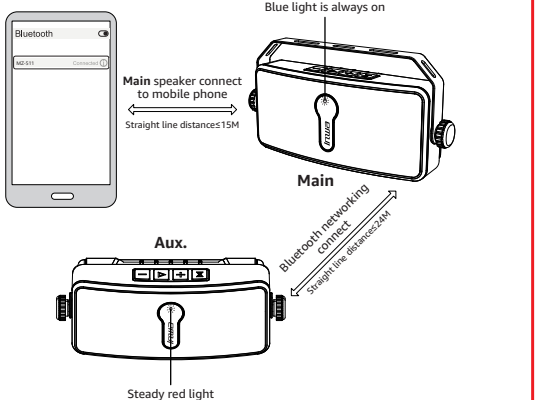

*Disconect network mode method: After two of more speakers are sucessfully connected, Long press the networking key for any **Aux.** speaker until the blue light flashes quickly to disconnect the **Aux.** speaker from network mode.

Step 3

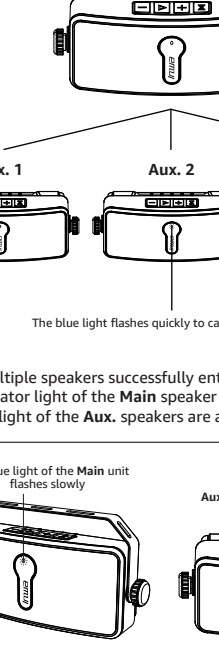When multiple speakers successfully enter the networking mode, the blue indicator light of the **Main** speaker flashes slowly, and the red indicator light of the **Aux.** speakers are always on.

INSTALLATION DIAGRAM

Note:

1. Please confirm the speaker can work normally before installing.
2. Tools in Figure A are not included.

Step 1

Remove the bracket from the product and drill two mounting holes in the wall spaced apart (see Figure A).

Step 2

Screw the bracket to the mounting holes on the wall with the screws in the accessories.

Step 3

Install the speaker on the bracket, adjust it to your desired angle and tighten the screw.

Support Information

Need further help, you can contact us by

A. Service E-mail: inwa_support@innosystemtech.com

B. Or contact us on Amazon

1. Go to Your Orders.
2. Find your order in the list.
3. Select Problem with order.
4. Choose your topic from list displayed. Select Contact seller.

UK	REP
----	-----

GOAL REACH CONSULTING LTD
OFFICE 1029 3 HARDMAN STREET 10TH FLOOR, SPINNINGFIELDS MANCHESTER, UK M3 3HF

OST UK 20230424000006 goalservice@hotmail.com
We simply act as UK representative for cross-border sellers, and are not manufacturers/importers/distributors for the product, nor involved in the manufacture/import/sale of the product. Therefore, we are not responsible for any after-sales services related to the product. In case of any product quality or infringement issues, the manufacturer/importer/seller shall be solely held responsible.

EU	REP
----	-----

SUCCESS COURIER SL
CALLE RIO TORMES NUM.1, PLANTA 1, DERECHA , OFICINA 3,Fuenlabrada, Madrid, 28947 Spain

OST_EU_20230424000022 successservice2@hotmail.com
We simply act as EU representative for cross-border sellers, and are not manufacturers/importers/distributors for the product, nor involved in the manufacture/import/sale of the product. Therefore, we are not responsible for any after-sales services related to the product. In case of any product quality or infringement issues, the manufacturer/importer/seller shall be solely held responsible.